


13" MID1301

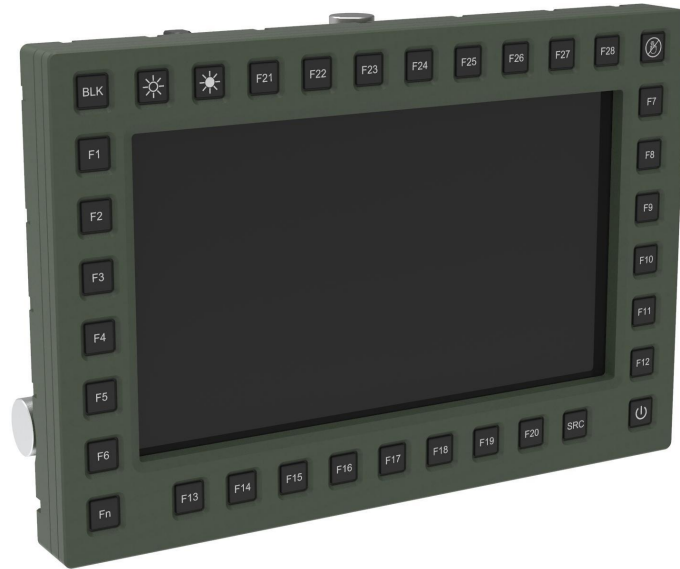

13.3" Modular Display

The MID1301 features a 13.3" full HD display, multi touch and 34 buttons on the front panel.

MilDef Intelligent Displays (MID)

The MID series offers a range of display sizes from 13" up to 18". Other sizes can be made as a customer project.

Removable computer module

All MID displays are compatible with MilDefs modular computers (MCS Series) via a standardized slot on the back of the unit. The computer module can be removed when not in operation for secure storage for classified information, training, or upgrades and software maintenance. The modular approach also enables midlife upgrades of the computer without the need to upgrade the display itself.

Military-relevant rugged design

MilDef products are designed to operate in extreme environmental conditions and challenging electromagnetic operational scenarios. Operationally proven, MilDef products are actively employed in military operations in over 60 countries.

Guaranteed performance

MilDef products are designed for the long lifecycles of military programs and come with a lifetime support program to ensure your equipment maintains peak performance for many missions to come.

We also guarantee the availability of spare parts for an additional 5 years after product end-of-life.

Features

- 13.3 inch full HD display
- 1000 nits
- Multi Touch
- 34 front buttons
- Removable computer (optional)

13" MID1301

Connector Interfaces

(back)	• 1x Docking interface
SERVICE (bottom)	• 1x RS232 Service
X1 DC IN (bottom)	• 1x Power
X2 (bottom)	• 2x USB
X3 (bottom)	• 1x ETH 1000BASE-T
X4 (back)	• 1x LOGIC • 1x RTC POWER

Other Interfaces

34x button panel (front)

Technical Specification

Blanking	Enable/disable all externally visible indicators from emitting light via the "blinking command"
Brightness control	Two buttons to control brightness
Contrast ratio	800
Display color	16.7M colors
Display luminance	1000 nits luminance
Display resolution	1920 x 1080 resolution
Display size	13.3 inch
Display surface	Hardened glass 6H
Response time	35 ms
Touch display	Multi touch
MIL-STD-1275E	Fully compliant
Polarity protection	Protected against incorrect polarity connection on the power input within the normal operating voltage range
Power consumption	120 W
Power input	12-36 VDC
Chassis material	Aluminum
Coating and color	Dupont AE0305-6603120 (RAL6031)
Cooling	Passively cooled
Earth point	M6 12 mm
Surface treatment chassis	Chromit-Al
Weight	5.8 kg (12.8 lbs)
MTBF	> 56,000 h
CE	Compliant

Environmental Specification

Functional shock - Operating	MIL-STD-810H, Method 516.8, Procedure I - Functional shock. Table 516.8-IV, Terminal peak sawtooth pulse, Ground materiel 40 g 11 ms
High temperature - Operating	MIL-STD-810H, Method 501.7, Procedure II - Operation 60 °C (140 °F)
High temperature - Storage	MIL-STD-810H, Method 501.7, Procedure I - Storage 71 °C (160 °F)
Humidity	MIL-STD-810H, Method 507.6, Procedure II - Aggravated 95 ± 4% RH Ten 24-hour cycles
IP Class (Solid Particle Protection)	IP Class 6X
IP Class (Water)	IP Class X7
Low air pressure - Rapid decompression	MIL-STD-810H, Method 500.6, Procedure III - Rapid decompression 2,438 m (8,000 ft) 12,192 m (40,000 ft)
Low air pressure - Operating	MIL-STD-810H, Method 500.6, Procedure II - Operation/air carriage 4,572 m (15,000 ft)
Low temperature - Operating	MIL-STD-810H, Method 502.7, Procedure II - Operation -40 °C (-40 °F)
Low temperature - Storage	MIL-STD-810H, Method 502.7, Procedure I - Storage -46 °C (-50.8 °F)
Noise level	Maximum noise level of 40 dB SPL A-weighting at 1 m (3.3 ft) distance
Salt fog	MIL-STD-810H, Method 509.7 5 ± 1% (by weight) Two cycles, 24 h wet + 24 h dry / cycle
Temperature shock - Operating	MIL-STD 810H, Method 503.7, Procedure I-C, - Multi-cycle shocks from constant extreme temperature 55 °C (131 °F) -40 °C (-40 °F)
Vibration - Helicopter	MIL-STD-810H, Method 514.8, Procedure I - General vibration, Category 14 - Rotary wing aircraft - helicopter
Vibration - Loose cargo	MIL-STD-810H, Method 514.8, Procedure II - Loose cargo transportation, Category 5 - Truck/trailer - loose cargo

13" MID1301

Vibration - Tracked vehicle	MIL-STD-810H, Method 514.8, Procedure I - General vibration, Category 20 - Ground vehicle - ground mobile, Tracked vehicle
Vibration - Wheeled vehicle	MIL-STD-810H, Method 514.8, Procedure I - General vibration, Category 20 - Ground vehicle - ground mobile, Wheeled vehicle

EMC Specification

EMI conducted CE102	MIL-STD-461F, Method CE102, Conducted emissions, power leads BASIC CURVE 10 kHz - 10 MHz
EMI radiated RE102	MIL-STD-461F, Method RE102, Radiated emissions, electric field Navy Mobile & Army 2 MHz - 18 GHz
EMS conducted CS101	MIL-STD-461F, Method CS101, Conducted susceptibility, power leads CURVE #1 30 Hz - 150 kHz
EMS conducted CS114	MIL-STD-461F, Method CS114, Conducted bulk susceptibility Army, Ground 10 kHz - 200 MHz
EMS conducted CS115	MIL-STD-461F, Method CS115, Conducted susceptibility, bulk cable injection, impulse excitation
EMS conducted CS116	MIL-STD-461F, Method CS116, Conducted susceptibility, damped sinusoidal transients, cables and power leads 10 kHz - 100 MHz
EMS radiated RS103	MIL-STD-461F Army 2 MHz - 18 GHz 50 V/m